

LED Floodlights for Yards and Arenas



Benefits

- Very bright, evenly distributed light
- Use 70% less energy than standard lights
- No maintenance
- Instant on / off, no flicker, glare or upwards light pollution
- Adjustable for optimum coverage




Features

- IP66, IK 10 rated, anti-corrosion coating
- Rotatable optics
- 5 year warranty
- TUV, UL, CB, GS, EMC, RoHS certified
- 100,000 + burning hours
- Fully adjustable U-shaped fixing bracket



U Shape Bracket

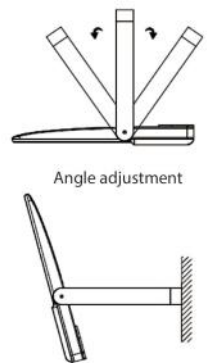

Specification

LED	Lumileds 5050
WATTS	145 W
LUMINERE OUTPUT	24699lm
REPLACE MHL	500 W
WEIGHT	4.8 kg
UNIT DIMENSIONS	585 x 270 x 56mm
INPUT VOLTAGE	Standard universal voltage 100– 277 Vac
LENS	Optical grade Mitsubishi polycarbonate
CCT	5000K